


IMPORTANT: When lifting the cut bar for the directional changes and thurn them with the hydraulic cylinder of the machine itself once the cutting bar is raised, it is necessary to pass over the mowed ded,


IT IS RECOMMENDED

not to excessively insist on recalling the idraulyc piston otherwise the structure of the machine is solicited unnecessarily with risk of damage

lifting the cut bar with hydraulic cylinder
whit harpoon system

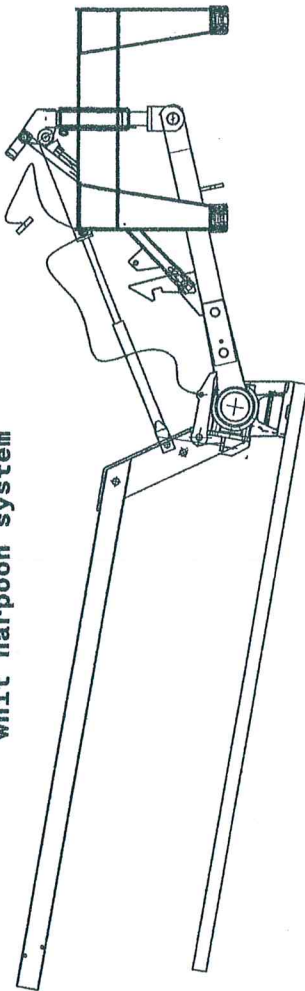


ROTARY MOWER DMD whit harpoon system

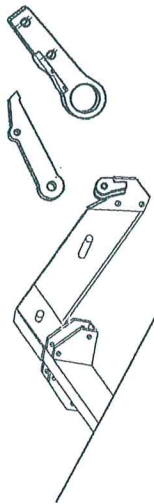


WORK POSITION

normal position of the bar for cut

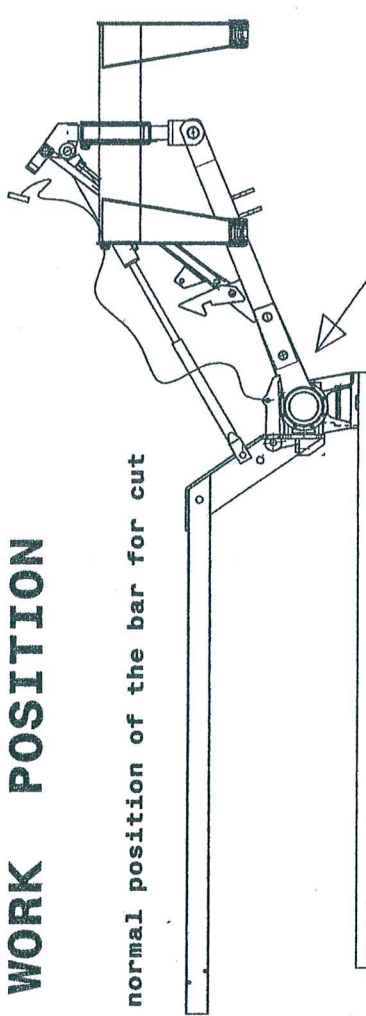


harpoon system

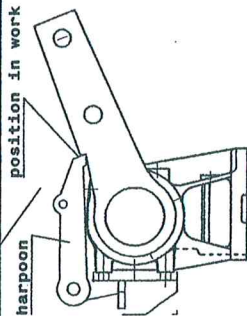

work position
of the harpoon for cut

TRANSPORT POSITION

rope for lifthing the harpoon

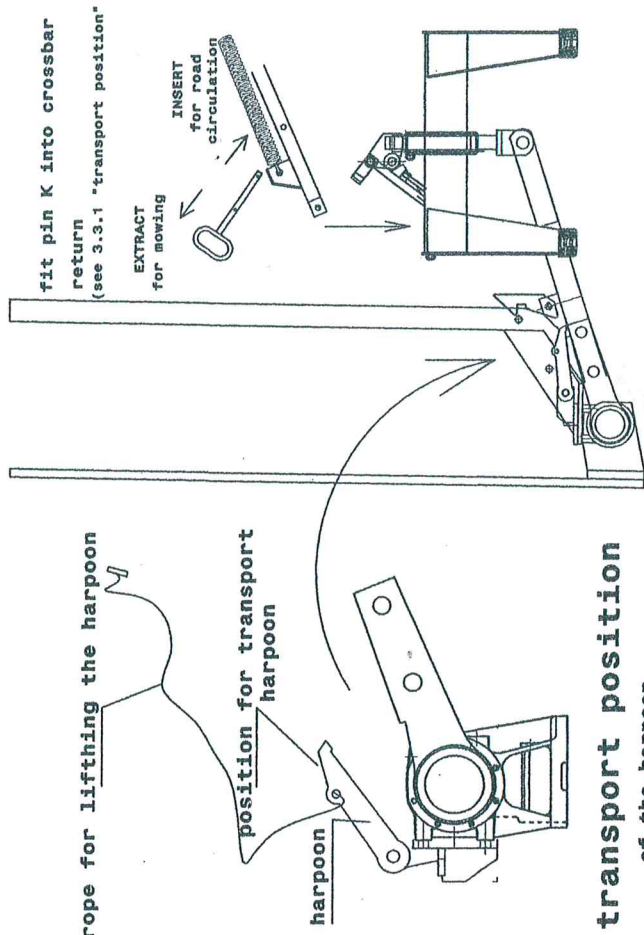

transport position
of the harpoon

the harpoon must climb over the detent